


2,0T

## TL-BA020


|                      |               |
|----------------------|---------------|
| CAPACITY:            | 2000 kg       |
| MIN. HEIGHT:         | 140 mm        |
| MAX. HEIGHT:         | 320 mm        |
| DIAMETER OF PADS:    | 190 mm        |
| WORKING PRESSURE:    | 8 Bar Max.    |
| WORKING TEMPERATURE: | -5 °C - 35 °C |
| WEIGHT:              | 10 kg         |

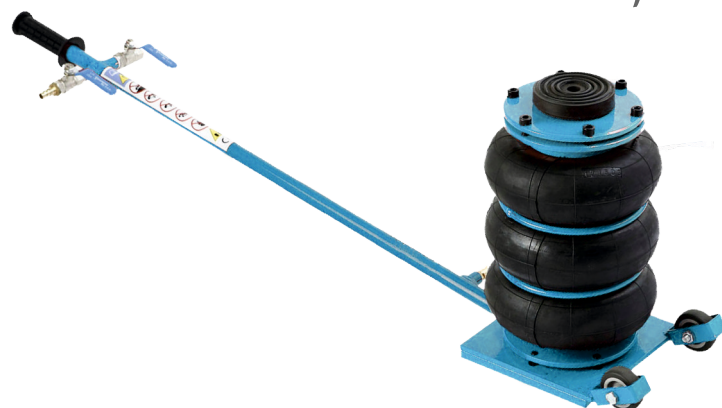

3,0T

## TL-BA030

|                      |               |
|----------------------|---------------|
| CAPACITY:            | 3000 kg       |
| MIN. HEIGHT:         | 140 mm        |
| MAX. HEIGHT:         | 380mm         |
| DIAMETER OF PADS:    | 240 mm        |
| WORKING PRESSURE:    | 8 Bar Max.    |
| WORKING TEMPERATURE: | -5 °C - 35 °C |
| WEIGHT:              | 20 kg         |

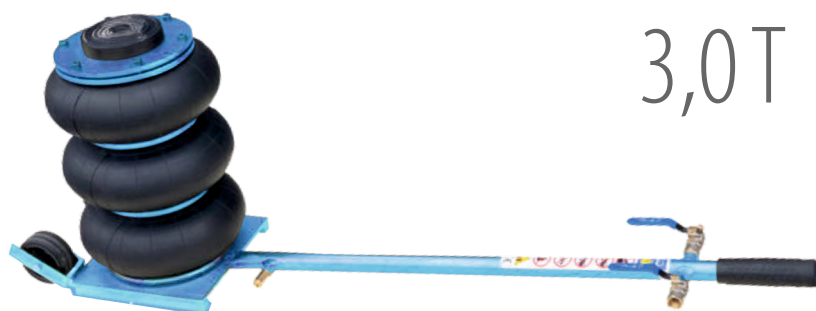

4,5T

## TL-BA045

|                      |               |
|----------------------|---------------|
| CAPACITY:            | 4500 kg       |
| MIN. HEIGHT:         | 140 mm        |
| MAX. HEIGHT:         | 380 mm        |
| DIAMETER OF PADS:    | 340 mm        |
| WORKING PRESSURE:    | 8 Bar Max.    |
| WORKING TEMPERATURE: | -5 °C - 35 °C |
| WEIGHT:              | 23 kg         |



8,0T

## TL-BA080

|                      |               |
|----------------------|---------------|
| CAPACITY:            | 8000 kg       |
| MIN. HEIGHT:         | 140 mm        |
| MAX. HEIGHT:         | 380 mm        |
| DIAMETER OF PADS:    | 440 mm        |
| WORKING PRESSURE:    | 8 Bar Max.    |
| WORKING TEMPERATURE: | -5 °C - 35 °C |
| WEIGHT:              | 30 kg         |

