GEO MASTER DYNAMIC III

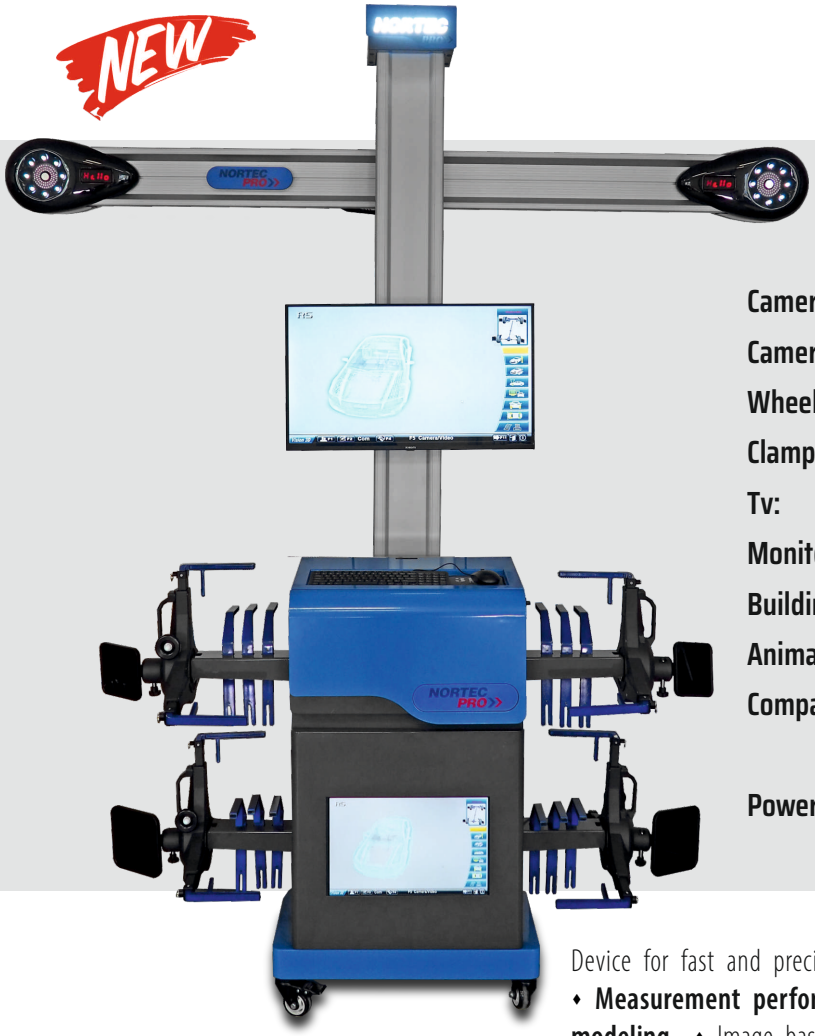

TECHNICAL DATA

Camera height adjustment:	Automatic
Camera resolution:	6,4 Megapixels
Wheel compensation:	Run out
Clamps:	3-points FULL BLACK
Tv:	Yes screen dimension 32"
Monitor:	YES
Buildin database:	Yes
Animation 3d with hints:	Yes
Compatible:	4-post lift, 2-post lift scisors lift, canal
Power supply:	230V50Hz

Device for fast and precise measurement of geometry in passenger and delivery vehicles • **Measurement performed in a three-dimensional system of chassis parameter modeling** • Image based on precise measuring cameras • 4 passive targets requiring no electronics • **Does not require perfectly leveled floor** • Intuitive and user-friendly interface • **Guidance system with animations on what, where, and how to adjust** • Compensation through vehicle rolling • **Camera height automatically adjustable** • **Intelligent dynamic angle recalibration system!** • Multilingual software, including Polish language! • **printer in standard**

PRECISE MEASURING CAMERA

ADDITIONAL MONITOR

3-POINTS CLAMPS

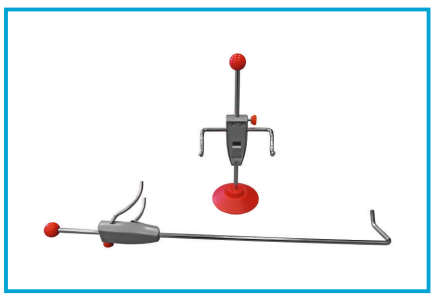

BRAKE AND WHEEL LOCK

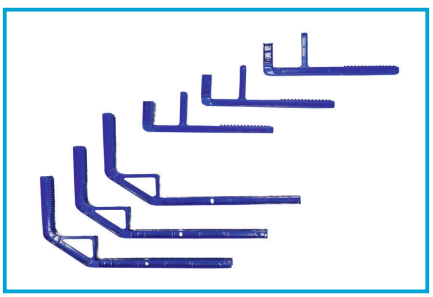

ADDITIONAL LONG FOR THE HOLDERS

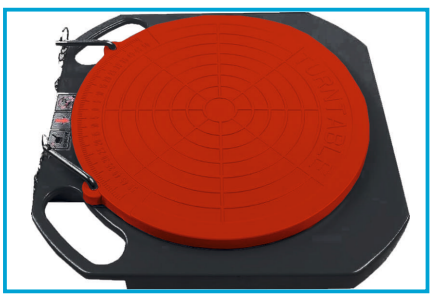

IRON TURNTABLES







Menu in **polish language!**

Simple and intuitive operation

Wide selection of vehicle brands!

(including non-standard ones, e.g. ALPINA!)

Adjustment system with intelligent hints along with animations!







Throughout the entire adjustment process we are led by the hand!

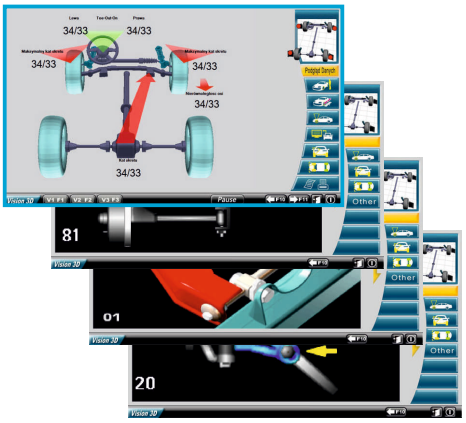

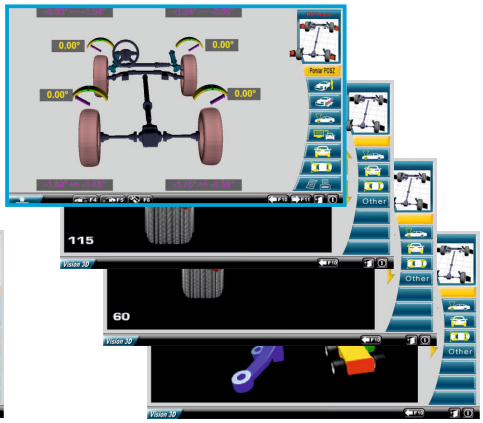

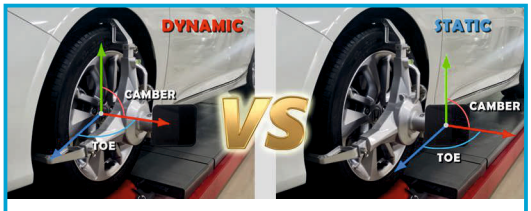

DYNAMIC ANGLE RECALIBRATION

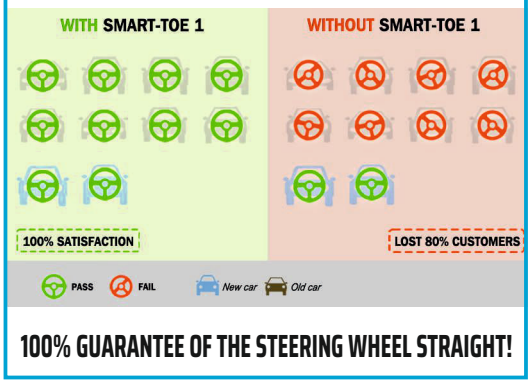

100% GUARANTEE OF THE STEERING WHEEL STRAIGHT!

MEASURING POSSIBILITIES:

- Total toe, semi-toe axes of the front and rear.
- Camber angle of the front and rear axles
- Caster and camber angle of the steering
- axle misalignment set
- The wheel steering angle, the geometric axis angle of the vehicle
- The difference in toe convergence
- The difference between the wheel camber angle and the steering knuckle caster angle
- A series of other additional measurements, such as wheelbase, track width



OPTIONAL STANDS FOR CLAMPS