

WC2130




POWER SUPPLY:	230V/50Hz
PNEUMATIC SUPPLY:	8-10 bar
MOTOR POWER:	350 W
SHAFT DIAMETER:	40 mm
MAX. WHEEL WEIGHT:	200 kg
MAX. WHEEL DIAMETER:	10" – 32"
RIM WIDTH:	1,5" – 20"
ACCURACY:	± 1g / ± 10 g ciężarowe
WEIGHT:	320 kg
NOISE LEVEL:	<70 dB (A)
SIZE OF THE PACKAGE:	145x84x115 cm

Balancing machine designed for balancing truck, light truck and passenger wheels • measuring the distance from the balancer with a measuring cup, diameter and width using a caliper • automatic wheel braking • automatic START / STOP activated by a protective hood • autodiagnosics • autocalibration, the ability to change units to inches and ounces • included a range cones and flange for balancing wheels of different diameter and rim structure • pneumatic wheel lifting • programs: static, dynamic, ALU.

STANDARD EQUIPMENT



CONTROL PANEL ON LED

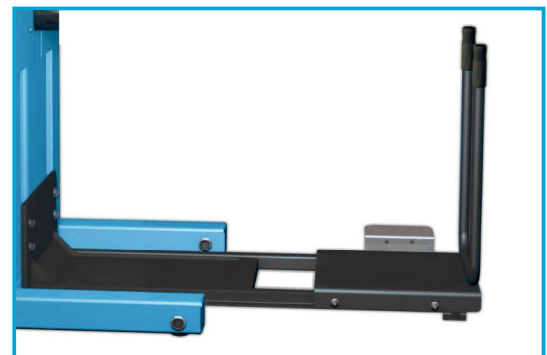

BUILT-IN WHEEL LIFT