


MO320  
PREMIUM

## TECHNICAL DATA:

SUPPLY:	400V/50Hz
MOTOR POWER:	0,75 kW
PNEUMATIC SUPPLY:	8-12 bar
EXTERNAL RIM RANGE:	11" - 21"
INTERNAL RIM RANGE:	13" - 24"
BEAD BREAKER FORCE:	2500 kg
MAX. WHEEL DIAMETER:	1150 mm
MAX. WHEEL WIDTH:	13"
NOISE LEVEL:	<70 dB
WEIGHT:	300 kg

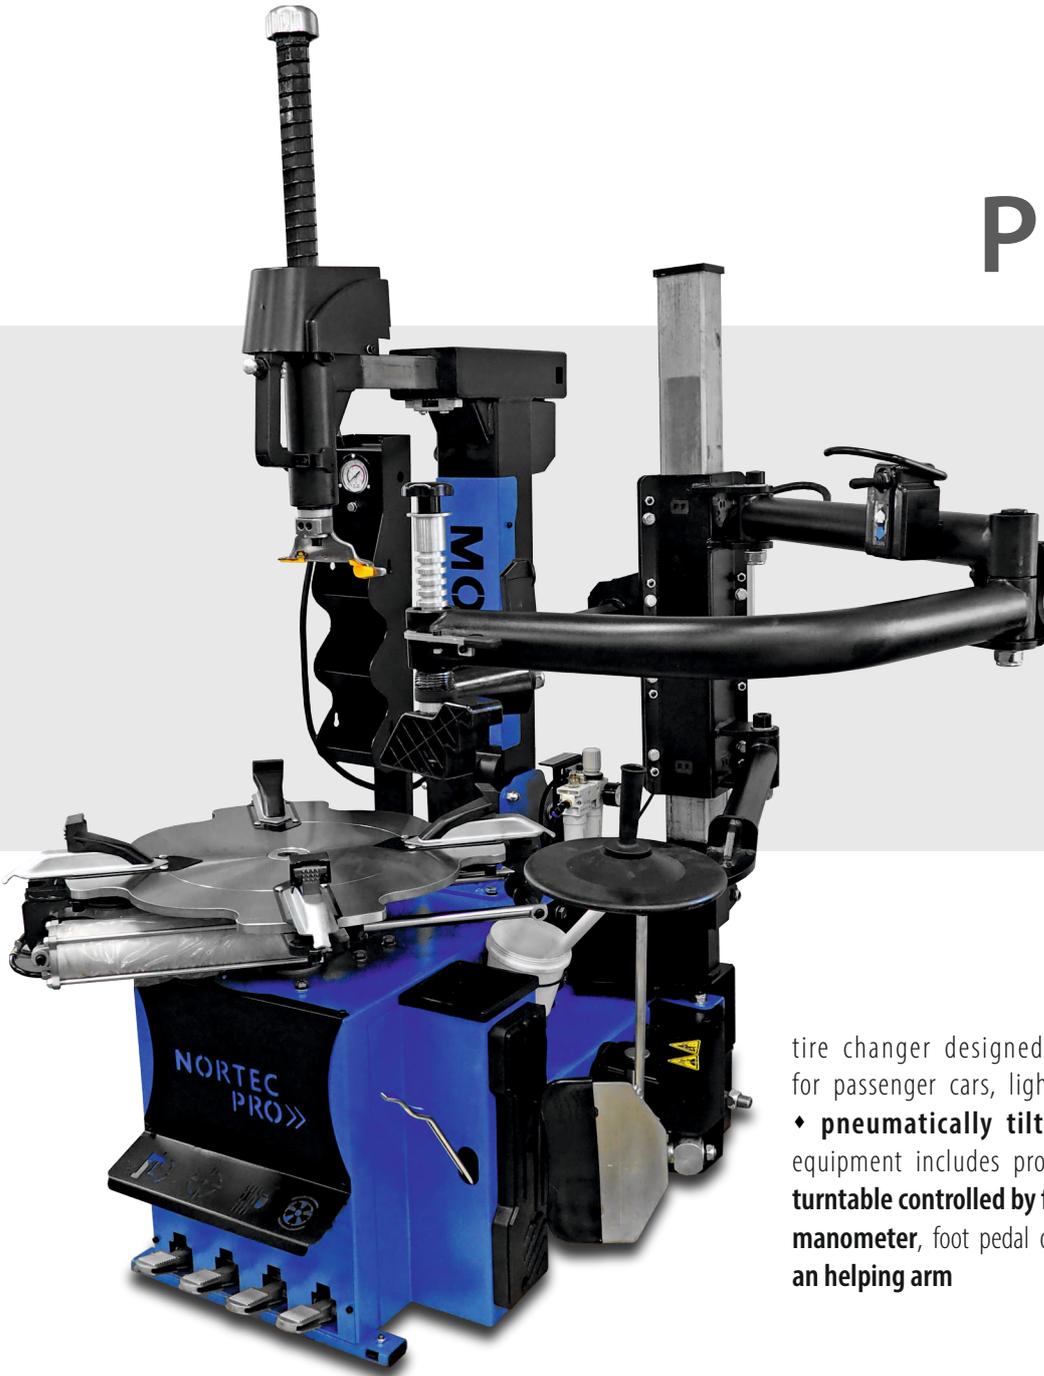

tire changer designed for mounting and dismounting tires for passenger cars, light commercial vehicles, and motorcycles

- ♦ pneumatically tilting and locking column
- ♦ standard equipment includes protective mounting inserts
- ♦ two-speed turntable controlled by foot pedal
- ♦ inflation gauge with integrated manometer, foot pedal operated
- ♦ standard equipment includes an helping arm



PNEUMATICALLY TILTING COLUMN  
AND LOCKABLE HEAD




FOOT PEDAL-CONTROLLED  
WHEEL INFLATION SYSTEM



PRESSURE GAUGE WITH MANOMETER  
FOR INFLATION



TWO TURNTABLE ROTATION SPEEDS  
CONTROLLED BY FOOT PEDAL

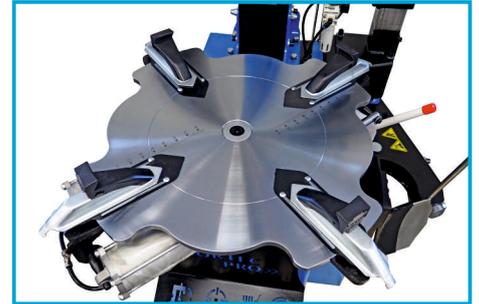

PROFILED TABLE MADE  
OF HIGH-STRENGTH STEEL



AIR PREPARATION UNIT INCLUDED  
AS STANDARD EQUIPMENT



PRESSING ROLLER OF THE HELPING ARM



PNEUMATICALLY CONTROLLED  
HELPING ARM



HELPING ARM PRESSURE  
WITH HEIGHT ADJUSTMENT



HELING ARM PLATE ASSISTING  
IN TYRE MOUNTING/DISMOUNTING