




MC603N

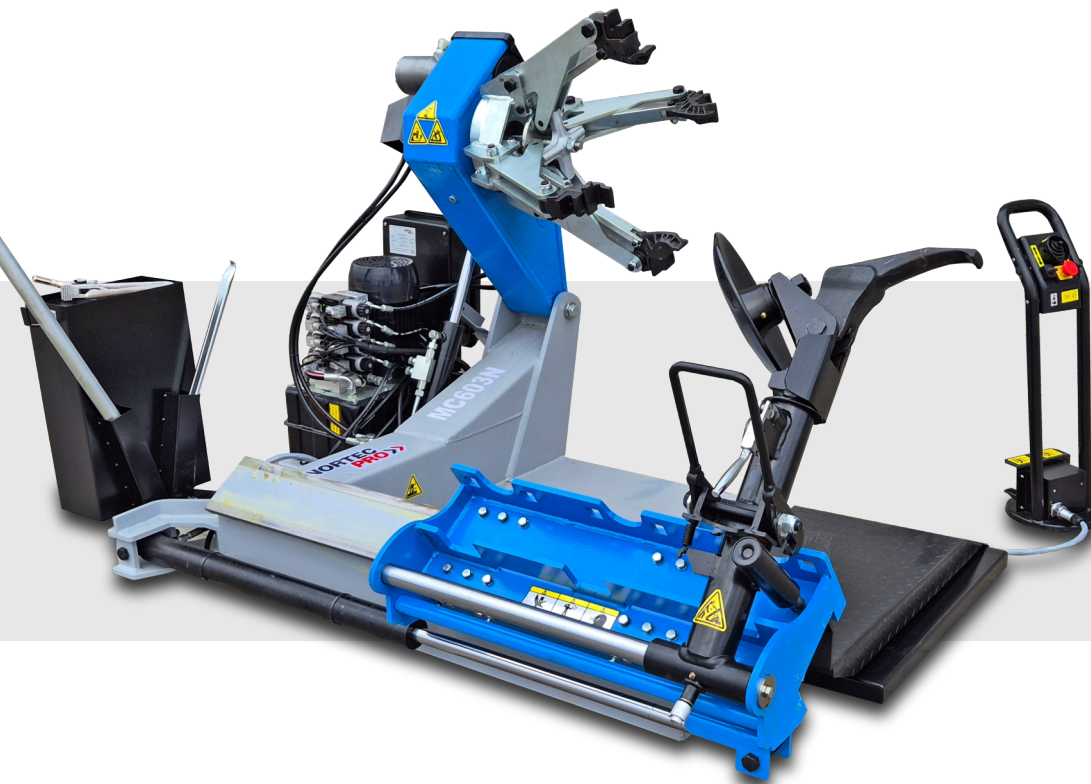

POWER SUPPLY:	400V/50Hz
PUMP MOTOR POWER:	1,5 kW
TRANSMISSION ENGINE POWER:	1,8 kW
RIM DIAMETER:	14" - 26"
RIM WIDTH:	780 mm
MAX. WHEEL DIAMETER:	1600 mm
WEIGHT:	650 kg
NOISE LEVEL:	< 70 dBA

Designed for mounting and dismounting tubed and tubeless tires. ♦ For servicing truck and bus wheels ♦ The breaker plate and claw are located on a rotating head allowing for quick tool changes ♦ Specially profiled breaker plate allows for efficient tire removal without the risk of damaging it. ♦ Movable platform allows for quick and precise wheel alignment. ♦ Safe control voltage (24V) eliminates the risk of electric shock.


STANDARD EQUIPMENT

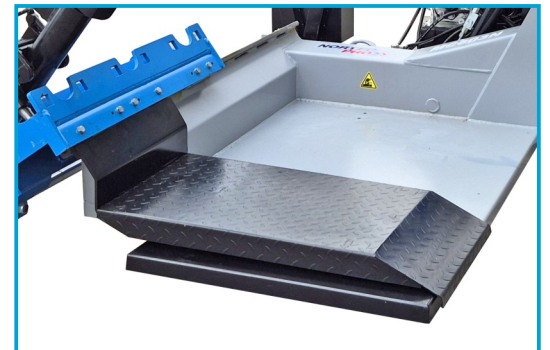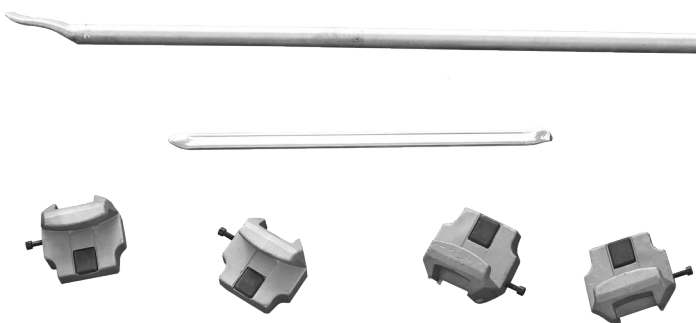

AUTOMATICALLY SLIDING PLATFORM



POWERFUL 2.2 kW PUMP MOTOR

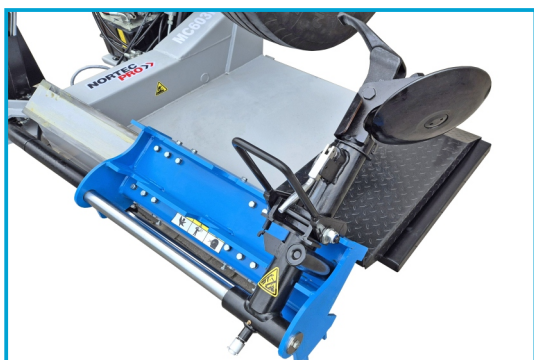

BRAKE AND CLAW ON A ROTATING HEAD



**WORKING PRESSURE MANOMETER
HYDRAULIC SYSTEM**



ADAPTERS FOR ALUMINUM RIMS AS STANDARD

