

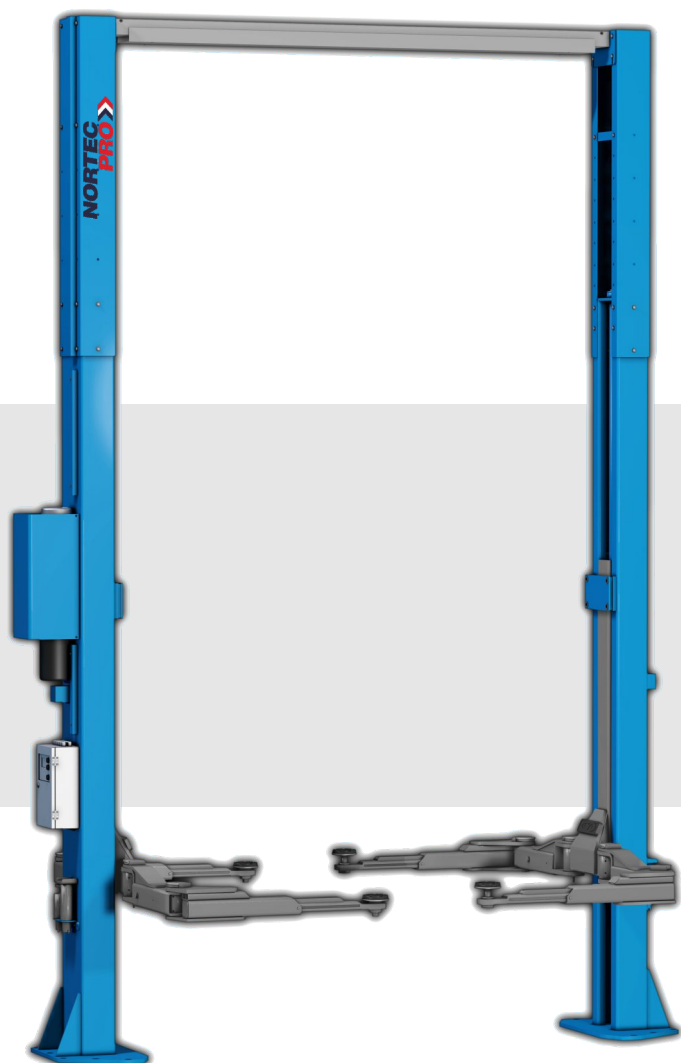


PD8000

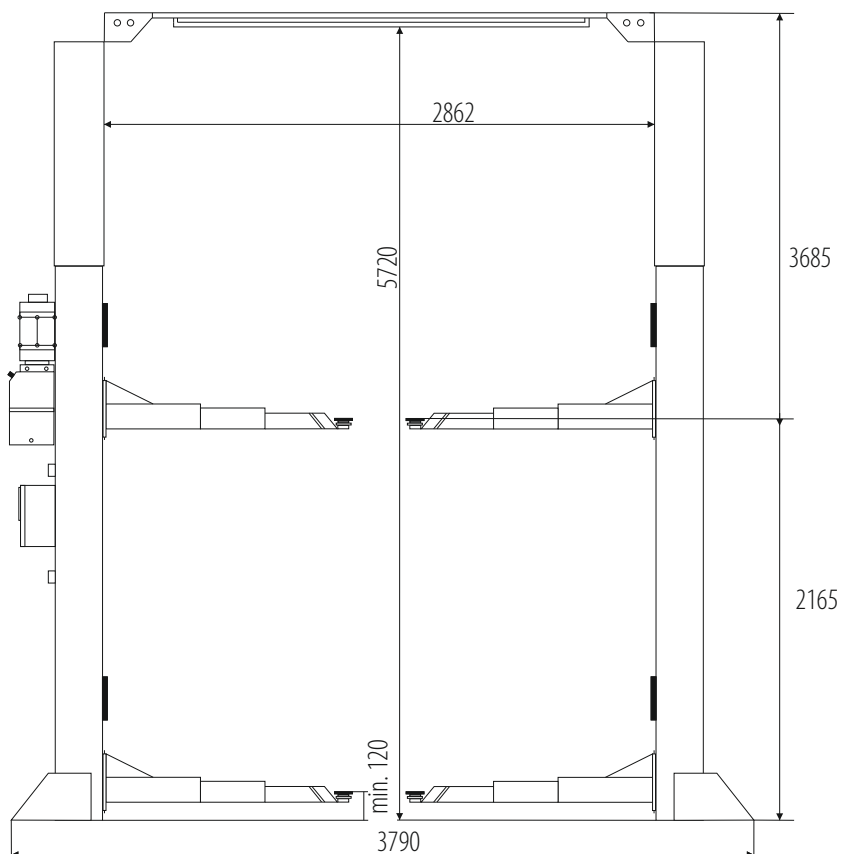



CAPACITY:	8000 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	3,5 kW
LIFTING HEIGHT:	120 - 2165 mm
TOTAL HEIGHT:	5850 mm
CLEARANCE:	2800 mm
2-STAGE ARMS:	770 - 1130 mm
OIL PRESSURE:	25 MPa
NOISE LEVEL:	<75 dB
WEIGHT:	2065 kg

Baseless electrohydraulic 2 post lift ♦ electronic synchronization ♦ electromagnetic height lock ♦ automatic arm lock during lifting ♦ articulated arms ♦ LCD display ♦ detailed display of operating parameters ♦ set of door protection.

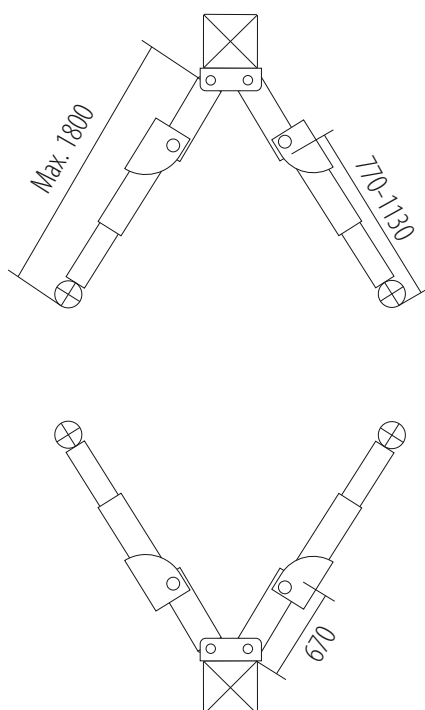

PD8000

Mechanical anchor M12/150 mm

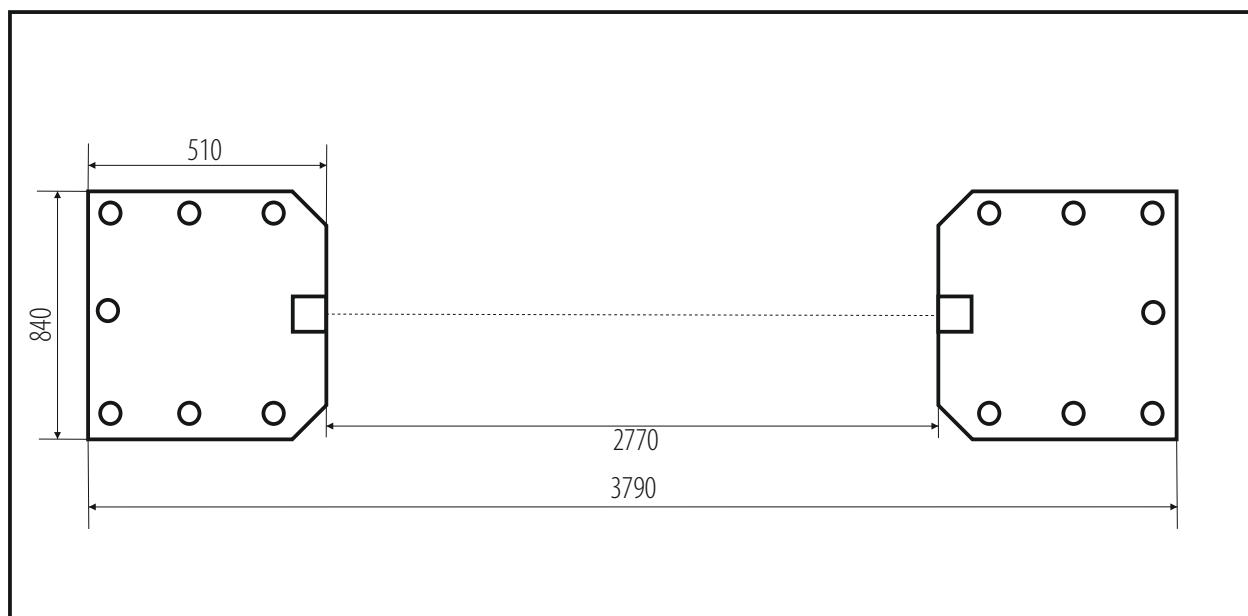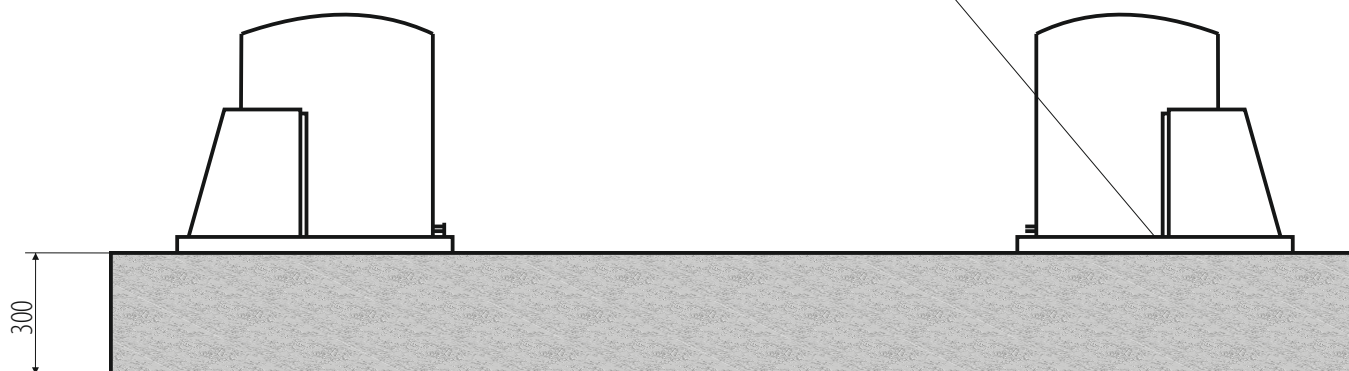

FLOOR DIMENSIONS: 4300x1500 mm

INSTALLATION REQUIREMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 4300x1500x300mm ♦ Acceptable floor imbalance: +/- 5mm, floor execution: 3 weeks before assembly ♦ Mounting anchors: mechanical M12 / 150 mm 14 pieces or chemical M16 / 250mm ♦ Hydraulic oil: HL32, 15.0l ♦ Power supply: 5x2.5mm cable to the place of assembly ♦ Current protection: min. 32A with 3-phase 400V / 50Hz power supply.

Installation allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm² ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.