


MC905




POWER SUPPLY:	400V/50Hz
PUMP MOTOR POWER:	4,0 kW
TRANSMISSION ENGINE POWER:	2,6 / 3,2 kW
RIM DIAMETER:	14" - 58"
RIM WIDTH:	1500 mm
MAX. WHEEL DIAMETER:	2600 mm
WEIGHT:	1600 kg
NOISE LEVEL:	< 70 dBA

Designed for mounting and dismounting of tubeless and tubed tires

- ♦ For handling wheels of heavy trucks, agricultural, construction and industrial machinery
- ♦ Two rotational speeds of the head ♦ Sliding gripper with head ♦ Specially profiled hammer disc allows for efficient operation dismantling the tire without the risk of damaging it ♦ Alloy rim protection in standard ♦ Safe control voltage (24V) eliminates the risk of electric shock

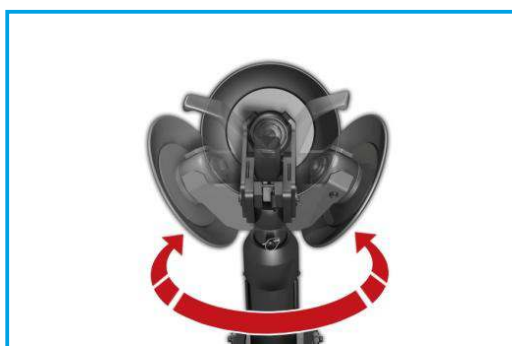


AUTOMATIC TOOL ROTATION

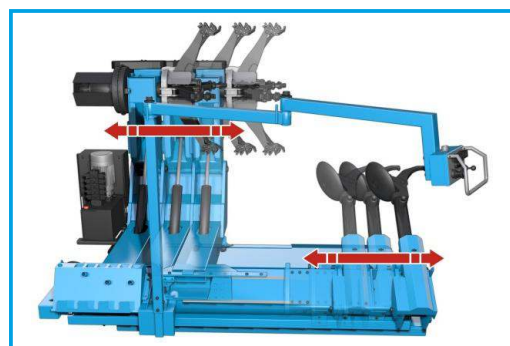

SLIDING GRIPPER WITH HEAD



AUTOMATIC ARM POSITIONING

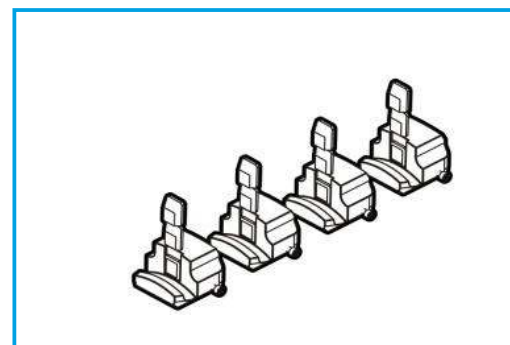

ALLOY RIM PROTECTION IN STANDARD